
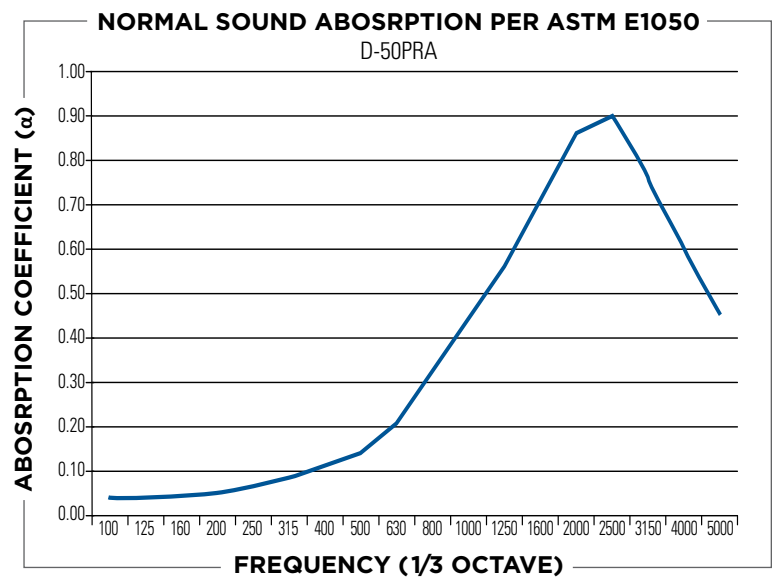



Product Description

TUF COTE D-50PRA foam features a perforated reinforced aluminum facing on polyurethane foam with an exceptionally low compression set. The facing allows the foams to withstand high radiant heat and keeps the temperatures of the foams and substrate significantly lower. The standard D-50PRA foam with facing meets the MVSS302 flame rating.

TYPICAL PROPERTIES	D-50PRA
Thickness	0.5"
Description Top Surface	Perforated Reinforced Aluminum
Density , kg/m ³ (lbs/ft ³) Foam, ASTM D1117	64.1 (4.0)
Thermal Conductivity BTU•in/hr•ft ² •°F at 75°F	0.26
Compression Set , (%) ASTM D3574, 50% Deflection Test D	6.4
Compression Force Deflection , kPa (psi) ASTM D3574 @ ambient 25% Deflection 50% Deflection	3.5 (0.51) 6.3 (0.91)
Odor/Mildew Resistance AATCC Method 30	Pass
Flammability FMVSS-302	Meets
Temperature Range , °C (°F) Recommended Service Temperature	-40°C to 107°C (-40°F to 225°F)

The above technical information and data should be considered representative or typical only and should not be used for specification purposes.

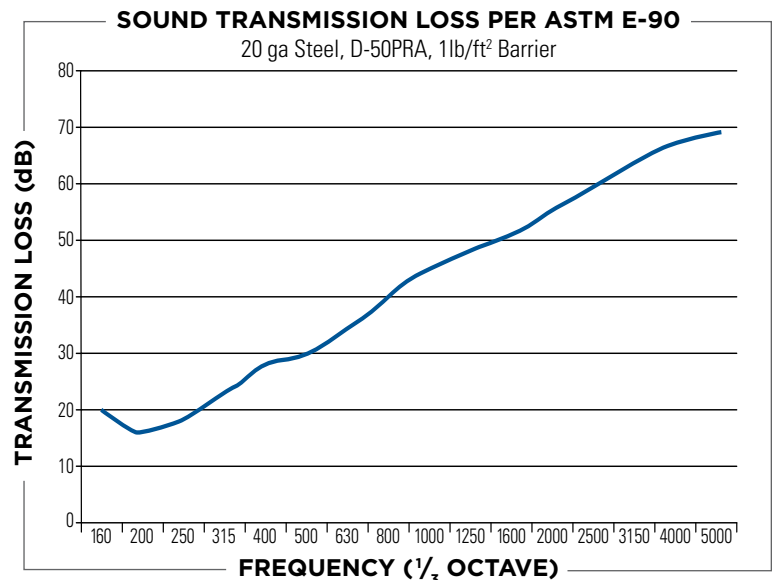

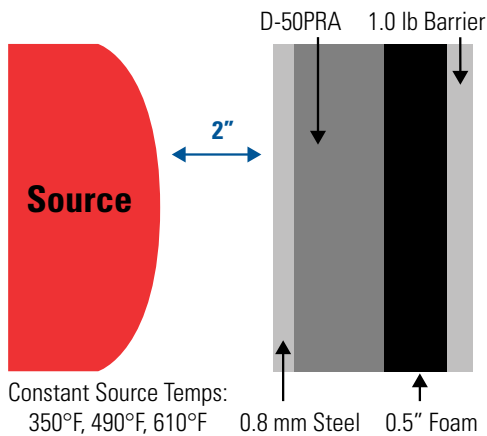


TUF-COTE™ D Series foam is very effective at reducing thermal loads in areas with high heat sources where little space is available.



HTTR Test

- Cylindrical Heat Source, variable from 80°F to 1300°F
- Distance from heat source to sample material variable from 0.5" to 5.0"
- System allowed to reach steady state before each measurement is taken (1 hour)

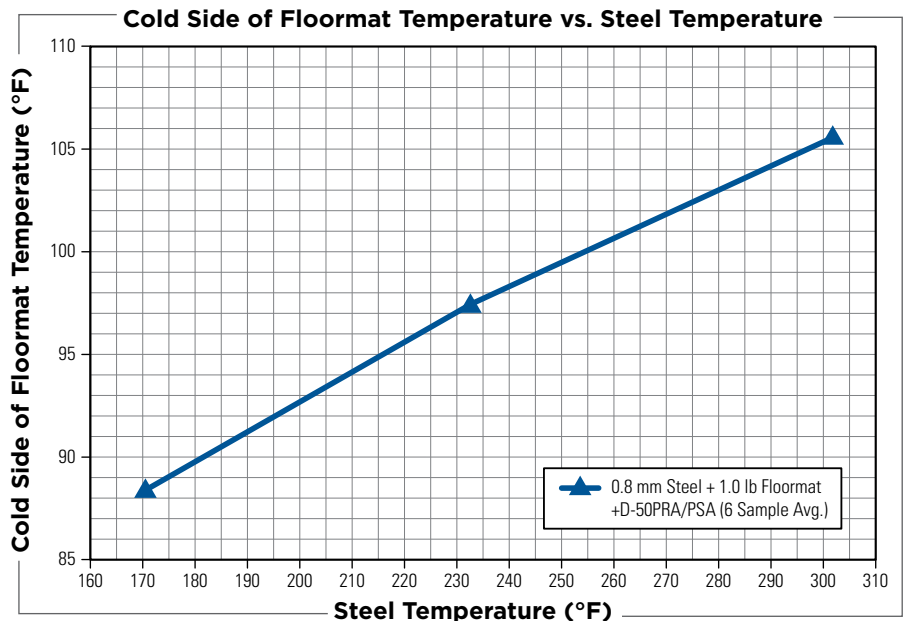

Technical Information

The technical information, recommendations and other statements contained in this document are based upon tests or experience that Aearo Technologies believes are reliable, but the accuracy or completeness of such information is not guaranteed.

Product Use

Many factors beyond Aearo Technologies's control and uniquely within user's knowledge and control can affect the use and performance of a Aearo Technologies product in a particular application. Given the variety of factors that can affect the use and performance of an Aearo Technologies product, user is solely responsible for evaluating the Aearo Technologies product and determining whether it is fit for a particular purpose and suitable for user's method of application.

Warranty, Limited Remedy, and Disclaimer

Unless an additional warranty is specifically stated on the applicable Aearo Technologies product packaging or product literature, Aearo Technologies warrants that each Aearo Technologies product meets the applicable Aearo Technologies product specification at the time Aearo Technologies ships the product. Aearo Technologies MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the Aearo Technologies product does not conform to this warranty, then the sole and exclusive remedy is, at Aearo Technologies's option, replacement of the Aearo Technologies product or refund of the purchase price.

Limitation of Liability

Except where prohibited by law, Aearo Technologies will not be liable for any loss or damage arising from the Aearo Technologies product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

