


DURABLE. DEPENDABLE. THERMAL PROTECTION YOU CAN DEPEND ON.

TUFshield™ Thermal Management Solutions

When it comes to on and off road transportation, heavy equipment is designed to perform in the most challenging conditions. As we push the limits of design to improve efficiency, engines are pushed to their limits, operating at temperature extremes — making for an uncomfortable and potentially hostile environment to surrounding components.

That's why Aearo Technologies LLC has created innovative new materials for thermal management. Rigorously tested and specially engineered, TUFshield™ materials are a line of thermal shielding products designed to help protect both components and people from potentially harmful heat sources.

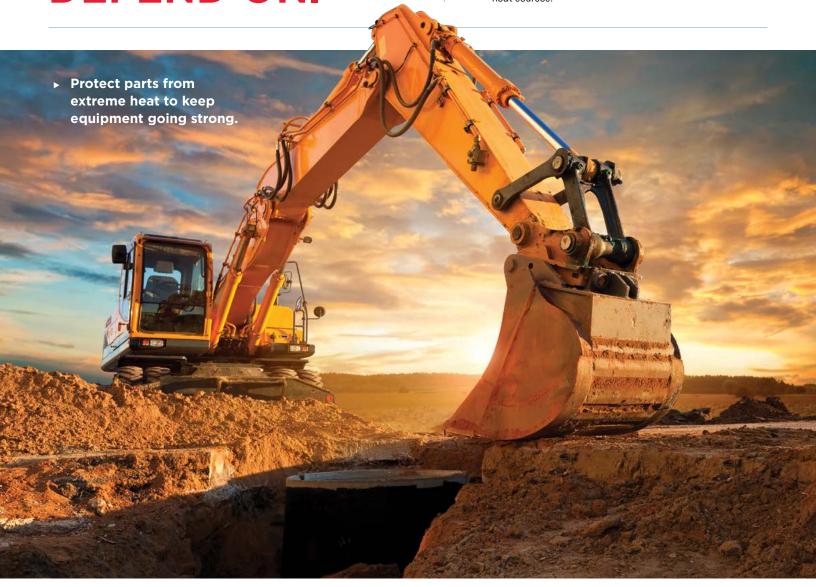

Introducing TUFshield™ Materials for Thermal Management


Tooling Method

Aearo Technologies LLC uses a proprietary, low-cost tooling method with TUFshield materials to help reduce the overall cost of the thermal acoustic solution. In addition, our tooling capabilities enable:

Low-Cost

- **Quick prototypes**
- **Easy tooling changes**
- **Optimal geometry**
- **Short tooling lead time**

These lightweight and formable TUFshield thermal materials are the latest defense in thermal management. The newest additions to our thermal shielding portfolio, TUFshield thermal management materials are designed to provide reliable protection and comfort in hot-running engine environments - even in tight spaces.

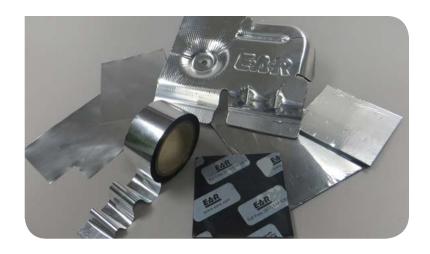


Features and Benefits

- Lightweight and highly conformable
- Resilient for use in interior and exterior conditions
- Thermal protection for machinery and interiors
- Easy attachment via adhesive or mechanical fasteners

Technical Expertise

At Aearo Technologies LLC, we use advanced thermal testing techniques to develop the best solution for your unique thermal management problems. In our state-of-the-art technology center, engineers test and analyze materials in different, real-world situations to determine economical and effective treatment options for each specific application. Our complete testing and validation methods have been fine-tuned to ensure our solutions offer the performance you need for your specific application.



TESTING OF TUFSHIELD IN AEARO TECHNOLOGIES LLC ACOUSTIC TECHNOLOGY CENTER.




TUFshield™ Material Portfolio

Adhesive Mounted Materials

Our aluminum/foam/PSA products are designed to be adhered directly to the component that needs protection from the heat source.

- Easily die-cut
- Fit into unusually shaped application areas and tight spaces
- Extremely durable material
- Resistant to potentially damaging situations

HIGH TEMPERATURE TEST RIG: TESTED ON 16 GA STEEL




Rigid Mounted Materials

Tough aluminum/foam/aluminum materials that can easily replace the metal shielding in your system and can streamline your application by allowing for the removal of a secondary heat shield material.

- For use with the most severe heat issues
- Easily formed into 3D shapes with air gap by using our proprietary, low-cost, tooling method
- Innovative part design helps fit into unusually shaped application areas and tight spaces
- ► Lab tested extremely durable material


TS-5475 COLD SIDE TEMPERATURE AS A FUNCTION OF HEAT SOURCE TEMPERATURE AT VARIOUS AIR GAPS



HEAT SOURCE SURFACE TEMPERATURE (°F)

How does it work?

Air gaps use moving air with the air convection effect to substantially decrease the temperature surrounding the heat sensitive components by decoupling the heat source from the component. By reducing the amount of radiant heat, TUFshield™ materials help protect against thermal damage to improve both reliability and length of use.

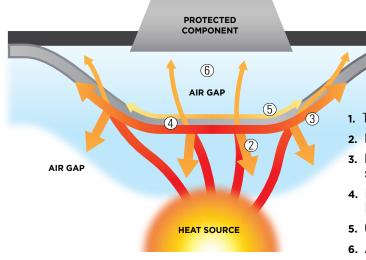

- 1. TUFshield thermal protection
- 2. High emissivity surface for "IR" rejection
- **3.** High thermal conductivity layer for hot spot elimination
- **4.** Low thermal conductivity core to reduce heat transmission
- 5. Conductive back layer for heat diffusion
- 6. Air gap provides additional insulation value



FOR FURTHER APPLICATION ASSISTANCE

Please contact our engineering specialists at solutions@earglobal.com

The data listed in this data sheet are typical or average values based on tests conducted by independent laboratories or by the manufacturer. They are indicative only of the results obtained in such tests and should not be considered as guaranteed maximums or minimums.

Materials must be tested under actual service to determine their suitability for a particular purpose.

Warranty and Limited Remedy: Aearo Technologies LLC warrants that each Aearo Technologies LLC product meets the applicable Aearo Technologies LLC product specification at the time Aearo Technologies LLC ships the product.

Aearo Technologies LLC MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS, INCLUDING ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If the

Aearo Technologies LLC product does not conform to this warranty, the sole and exclusive remedy is, at Aearo Technologies LLC's option, replacement of the Aearo Technologies LLC product or refund of the purchase price.

Limitation of Liability: Except where prohibited by law, Aearo Technologies LLC will not be liable for any loss or damage arising from the Aearo Technologies LLC product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

