



E·A·R™

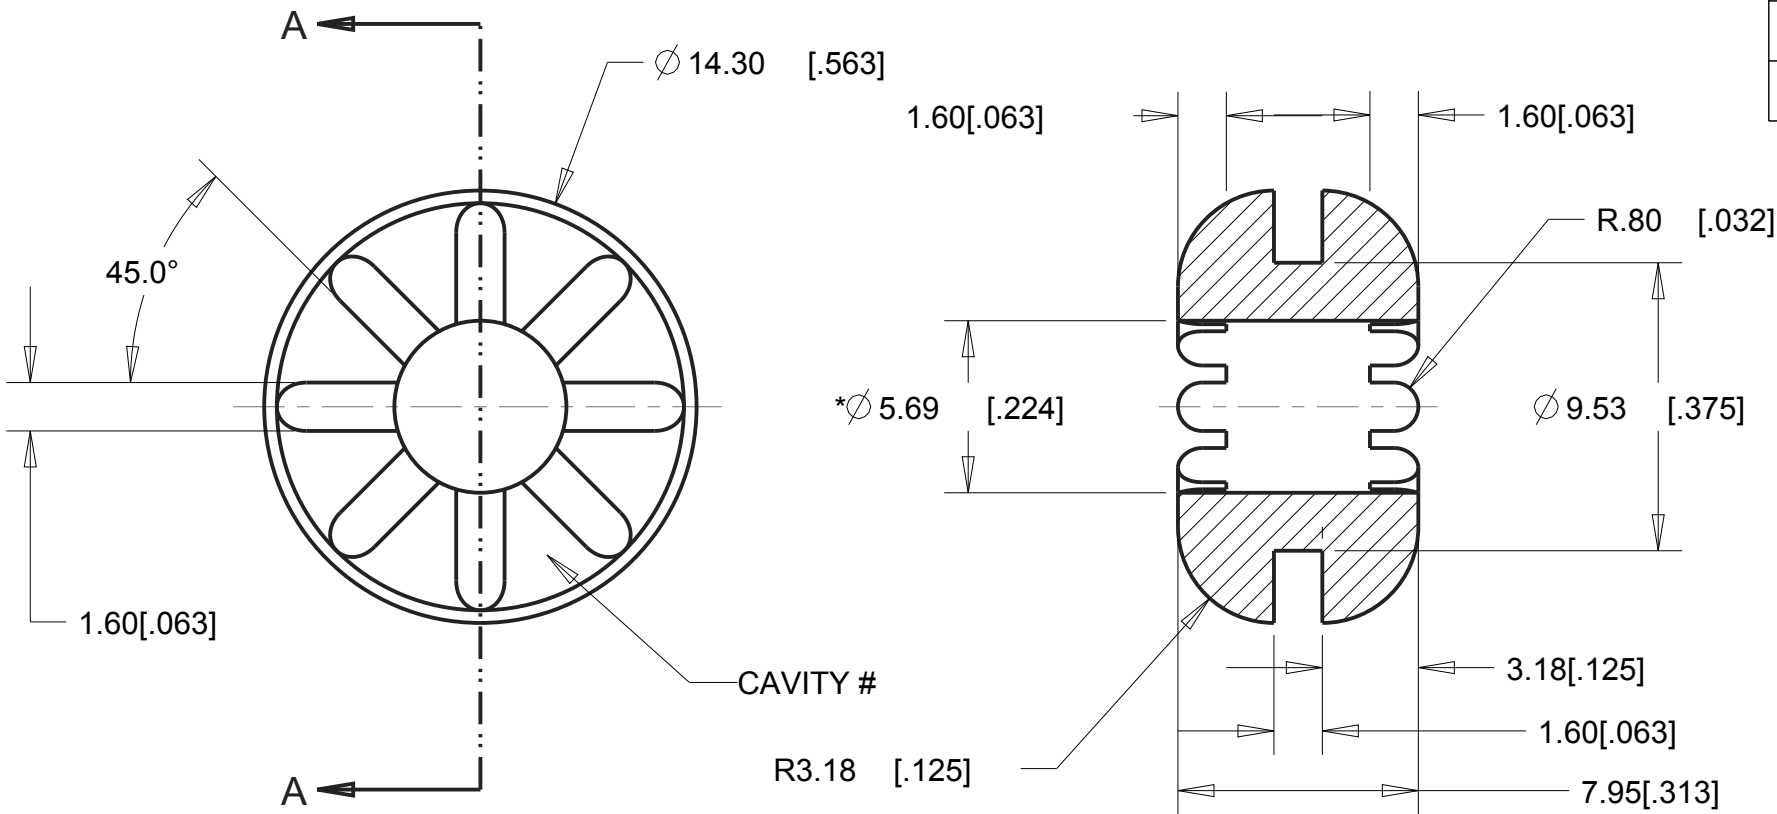

SECTION A-A

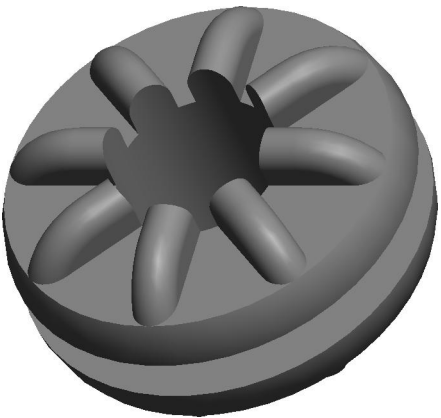

GROMMET MATERIAL	SEE PAGE
ISODAMP	1
VERSADAMP	1
ISOLOSS	2

G-401-3	C-1100
G-401-2	C-1105
G-401-1	C-1002
G-403-V2325	V-2325
G-401-C8002	C-8002
G-401-C8001	C-8001
G-401-C8012	C-8012
PART NUMBER	MATERIAL

RANGE	TOL
0<D=<2 [.079]	± 0.15 [.006]
2 [.079]<D=<25 [.984]	± 0.25 [.010]
25 [.984]<D=<50 [1.969]	± 0.4 [.016]
50 [1.969]<D	± 0.6 [.024]

1. CRITICAL DIMENSIONS ARE MARKED WITH "*".
2. CRITICAL DIMENSIONS SHALL HAVE C_{pk} VALUE >= 1.33 WITH ONGOING SPC DATA REQUIRED.
3. MAX DRAFT: 2°
4. FOR VERSADAMP AND ISODAMP MATERIAL, USE THE TOLERANCE TABLE ON PAGE 2.
5. FOR ISOLOSS MATERIAL, USE THE TOLERANCE TABLE ON PAGE 2.

NOTES:

UNLESS OTHERWISE SPECIFIED UNITS ARE: MM [IN] TOLERANCES ARE IN THE TABLE TO THE LEFT: ANGLES ±1.0°	MATERIAL: SEE TABLE ON LEFT	AEARO TECHNOLOGIES LLC * a 3M company		
	QUALITY CONTROL: MUST COMPLY WITH AEARO TECHONOLGIES LLC SUPPLIER QUALITY MANUAL REQUIREMENTS	TITLE GROMMET - SYMMETRIC, INTERNALLY RIBBED		
	GATE: ±0.15MM [.006]	SIZE B	ITEM CODE	DWG NO. G-401-X PAGE 1 OF 2
	CALC WT 0.76 GRAM REF	ANY FEATURE NOT DIMENSIONED IN PRINT MUST BE VISIBLY PRESENT, UTILIZE 3D CAD FOR CREATION		

