

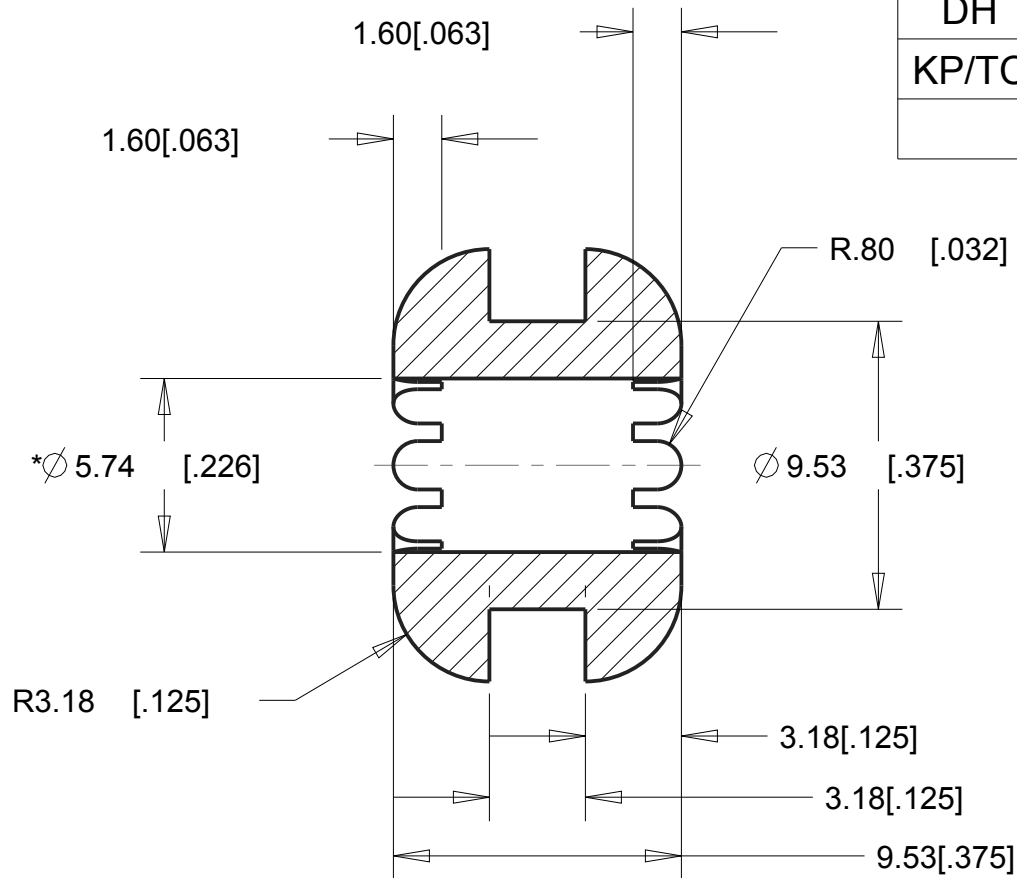


E·A·R™

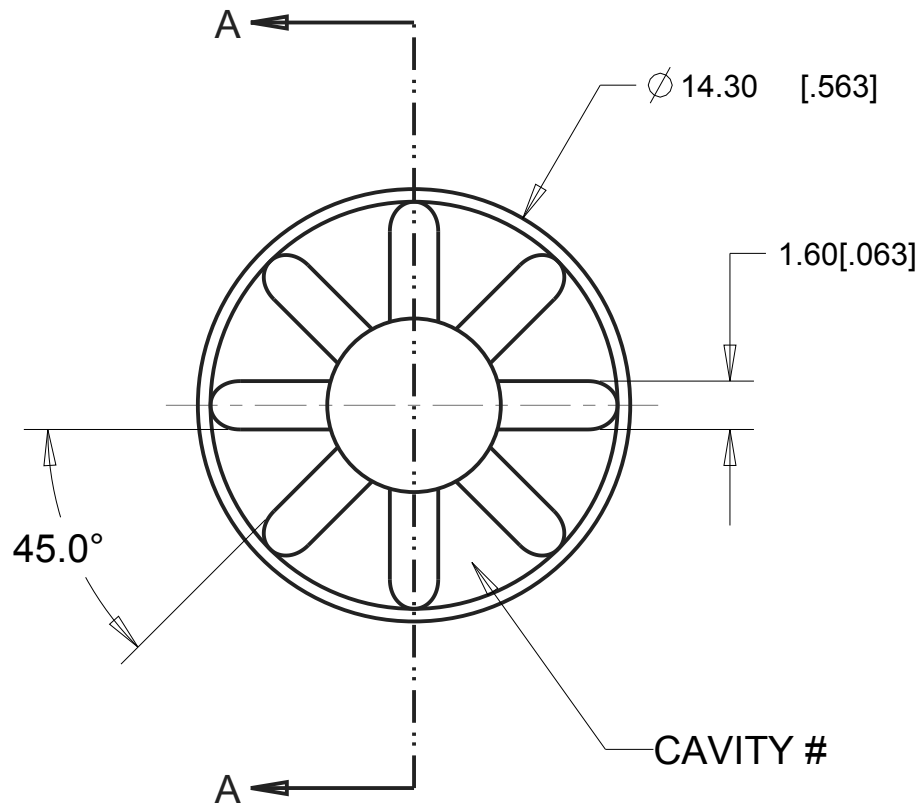

SECTION A-A

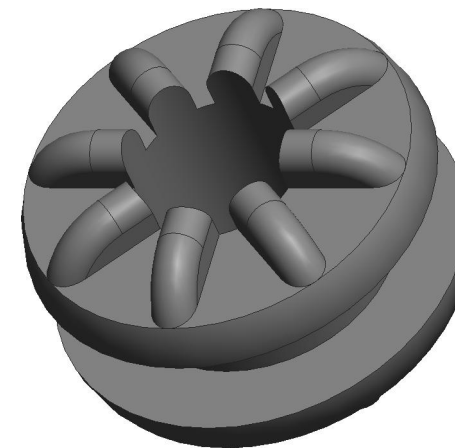

REVISIONS

DRAWN	REV	DESCRIPTION	DATE	APPROVED
DH	00	ORIGINAL	8-26-98	DC
KP/TC	01	UPDATED FORMAT, NOTES, TOLERANCES, ADDED WEIGHT, CAVITY LOCATION, MISSING DIMS AND -X TO NAMING CONVENTION.	6-14-12	MS

1. CRITICAL DIMENSIONS ARE MARKED WITH "**".
2. CRITICAL DIMENSIONS SHALL HAVE Cpk VALUE >= 1.33 WITH ONGOING SPC DATA REQUIRED.
3. MAX DRAFT: 2°.
4. FOR VERSADAMP AND ISODAMP MATERIAL, USE THE TOLERANCE TABLE ON PAGE 2.
5. FOR ISOLOSS MATERIAL, USE THE TOLERANCE TABLE ON PAGE 2.

NOTES:

UNLESS OTHERWISE SPECIFIED UNITS ARE: MM [IN] TOLERANCES ARE IN THE TABLE TO THE LEFT: ANGLES ±1.0°	MATERIAL: SEE TABLE ON LEFT		AEARO TECHNOLOGIES LLC * a 3M company	
	QUALITY CONTROL: MUST COMPLY WITH AEARO TECHONOLGIES LLC SUPPLIER QUALITY MANUAL REQUIREMENTS		TITLE GROMMET - SYMMETRIC, INTERNALLY RIBBED	
	GATE: ±0.15MM [.006]	NOTES: ANY FEATURE NOT DIMENSIONED IN PRINT MUST BE VISIBLY PRESENT, UTILIZE 3D CAD FOR CREATION	SIZE B	ITEM CODE
	CALC WT 0.85 GRAM REF		DWG NO. G-402-X PAGE 1 OF 2	

RANGE	TOL
0<D=<2 [.079]	± 0.15 [.006]
2 [.079]<D=<25 [.984]	± 0.25 [.010]
25 [.984]<D=<50 [1.969]	± 0.4 [.016]
50 [1.969]<D	± 0.6 [.024]

GROMMET MATERIAL	SEE PAGE
ISODAMP	1
VERSADAMP	1
ISOLOSS	2

G-402-3	C-1100
G-402-2	C-1105
G-402-1	C-1002
G-402-C8002	C-8002
G-402-C8001	C-8001
G-402-C8012	C-8012
PART NUMBER	MATERIAL

1

2

3

4

REVISIONS



D

D

C

C

B

B

A

A

G-402-SL60300	SL-60300
G-402-SL50300	SL-50300
G-402-SL35300	SL-35300
G-402-SL20300	SL-20300
PART NUMBER	MATERIAL

RANGE	TOL
0<D=<10 [.394]	± 0.15 [.006]
10 [.394]<D=<20 [.787]	± 0.2 [.008]
20 [.787]<D=<50 [1.969]	± 0.25 [.010]
50 [1.969]<D=<80 [3.150]	± 0.35 [.014]
80 [3.150]<D	± 0.5%

UNLESS OTHERWISE SPECIFIED UNITS ARE: MM [IN] TOLERANCES ARE IN THE TABLE TO THE LEFT: ANGLES ±1.0°		MATERIAL: SEE TABLE ON LEFT		AEARO TECHNOLOGIES LLC * a 3M company	
ALLOWABLE FLASH: 0.3 MM [0.012]		QUALITY CONTROL: MUST COMPLY WITH AEARO TECHONOLGIES LLC SUPPLIER QUALITY MANUAL REQUIREMENTS		TITLE GROMMET - SYMMETRIC, INTERNALLY RIBBED	
GATE:		NOTES: ANY FEATURE NOT DIMENSIONED IN PRINT MUST BE VISIBLY PRESENT, UTILIZE 3D CAD FOR CREATION		SIZE B	ITEM CODE
CALC WT 0.72 GRAM REF				DWG NO.	G-402-X PAGE 2 OF 2

1

2

3

4