



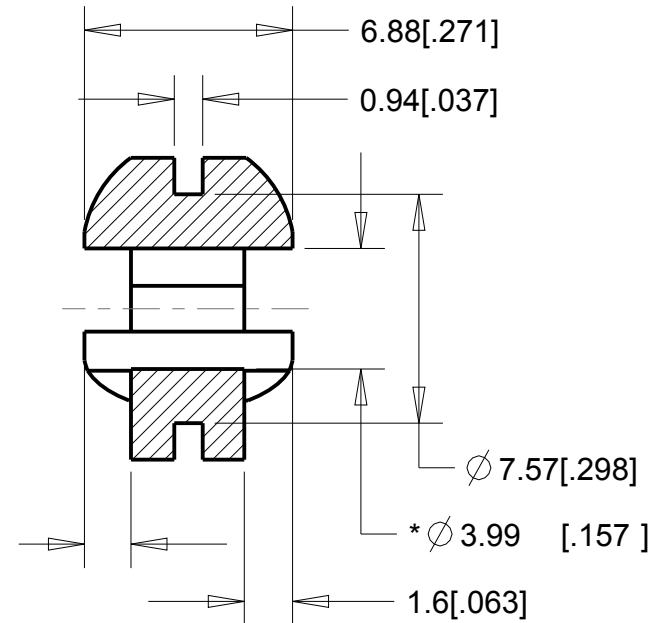


REVISIONS

DRAWN	REV	DESCRIPTION	DATE	APPROVED
SB	00	ORIGINAL	10-12-05	JAS
KP/TC	01	UPDATED FORMAT, NOTES, TOLERANCES, ADDED WEIGHT, CAVITY LOCATION, AND -X TO NAMING CONVENTION.	9-8-11	MS

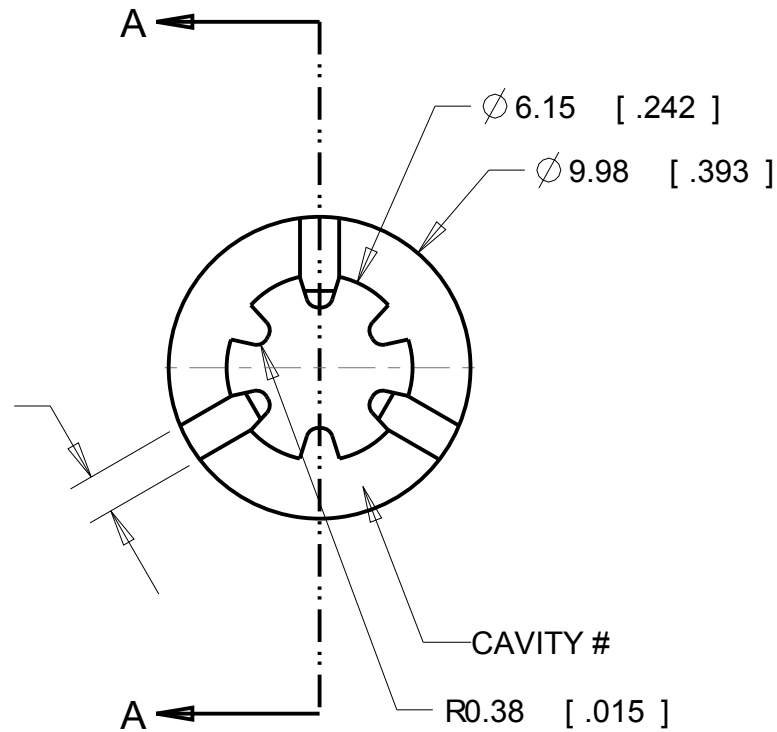

SECTION A-A

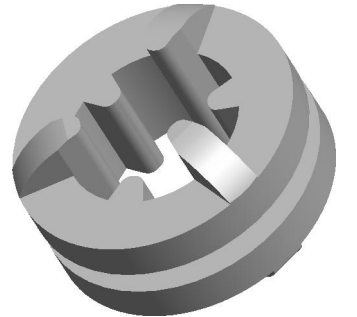

G-461-C8012

C-8012

G-461-C8002

C-8002

G-461-C8001

C-8001

G-461-1

C-1002

G-461-2

C-1105

G-461-3

C-1100

G-461-V2325

V-2325

G-461-V2525

V-2525

G-461-V2725

V-2725

G-461-V2350

V-2350

G-461-V2375

V-2375

G-461-V2550

V-2550

G-461-V2575

V-2575

G-461-V2590

V-2590

G-461-V2750

V-2750

G-461-V2775

V-2775

PART NUMBER

MATERIAL

RANGE

TOL

0<DIM<=2 [.078]

± 0.15 [.006]

2 [.078]<DIM<=25 [.98]

± 0.25 [.010]

25 [.98]<DIM<=50 [1.969]

± 0.4 [.016]

50 [1.969]<DIM

± 0.6 [.024]

UNLESS OTHERWISE SPECIFIED
UNITS ARE: MM [IN]
TOLERANCE FOR ANGLES: $\pm 0.0^{\circ}$

MATERIAL:

SEE TABLE

AEARO TECHNOLOGIES LLC * a 3M company

QUALITY CONTROL:
MUST COMPLY WITH E-A-R
SPECIALTY COMPOSITES
SUPPLIER QUALITY MANUAL
REQUIREMENTS

TITLE

RIBBED GROMMET

GATE:
±.25MM [.010]

NOTES:

ANY FEATURE NOT DIMENSIONED
IN PRINT MUST BE VISIBLY PRESENT,
UTILIZE 3D CAD FOR CREATION

SIZE
B

DRAWING NO.

G-461-X

PAGE NO.

1 OF 1

3. MAX DRAFT: 2° .

2. CRITICAL DIMENSIONS SHALL HAVE Cpk VALUE >= 1.33 WITH ONGOING SPC DATA REQUIRED.

1. CRITICAL DIMENSIONS ARE MARKED WITH "**".

NOTES: