


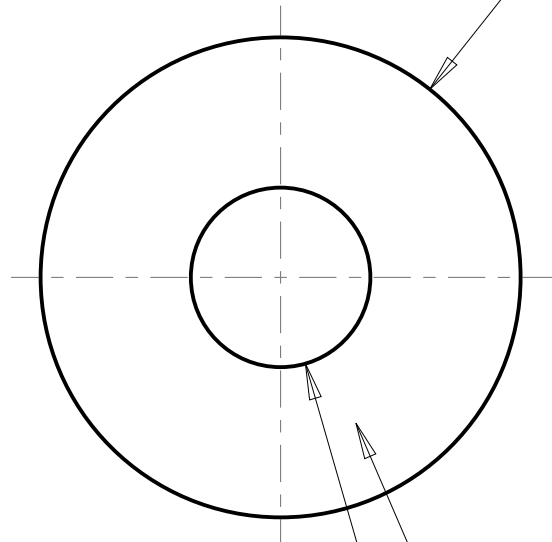

Ø 12.7 [.500]

REF 3.05 [.120]

1.52[.060]


CAVITY #

*Ø 4.75 [.187]

0.76[.030]

Ø 9.14[.360]

0.76[.030]

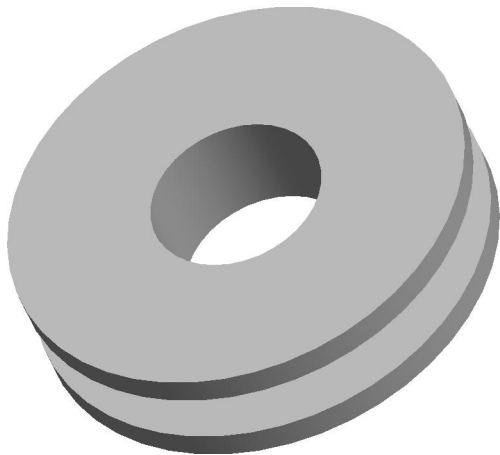

REVISIONS

DRAWN	REV	DESCRIPTION	DATE	APPROVED
	00	ORIGINAL	9-20-99	DC
KP/TC	01	UPDATED FORMAT, NOTES, TOLERANCES, ADDED WEIGHT, CAVITY LOCATION, AND -X TO NAMING CONVENTION.	9-8-11	MS

3. MAX DRAFT: 2° .

2. CRITICAL DIMENSIONS SHALL HAVE Cpk VALUE >= 1.33 WITH ONGOING SPC DATA REQUIRED.

1. CRITICAL DIMENSIONS ARE MARKED WITH "***".

NOTES:

UNLESS OTHERWISE SPECIFIED UNITS ARE: MM [IN] TOLERANCE FOR ANGLES: $\pm 0.0^\circ$	MATERIAL: SEE TABLE ON LEFT	AEARO TECHNOLOGIES LLC * a 3M company		
	QUALITY CONTROL: MUST COMPLY WITH E-A-R SPECIALTY COMPOSITES SUPPLIER QUALITY MANUAL REQUIREMENTS	TITLE GROMMET - SYMMETRIC, NON-RIBBED		
	GATE: ± 0.25 MM [.010]	SIZE B	DRAWING NO. G-501-X	PAGE NO. 1 OF 1
	0.31 GRAM REF			

G-501-1	C-1002
G-501-2	C-1105
G-501-3	C-1100
G-501-8	C-8002
G-501-C8012	C-8012
G-501-C8001	C-8001
G-501-V2325	V-2325
G-501-V2350	V-2350
G-501-V2375	V-2375
G-501-V2525	V-2525
G-501-V2550	V-2550
G-501-V2575	V-2575
G-501-V2590	V-2590
G-501-V2599	V-2599
G-501-V2725	V-2725
G-501-V2750	V-2750
G-501-V2775	V-2775
PART NUMBER	MATERIAL

RANGE	TOL
0<DIM<=2 [0.078]	± 0.15 [.006]
2 [0.078]<DIM<=25 [0.98]	± 0.25 [.010]
25 [0.98]<DIM<=50 [1.969]	± 0.4 [.016]
50 [1.969]<DIM	± 0.6 [.024]